





Electric actuator ARI-PREMIO®

Electric thrust actuator
ARI-PREMIO®
2,2 - 5 kN (495 - 1124 lbf)

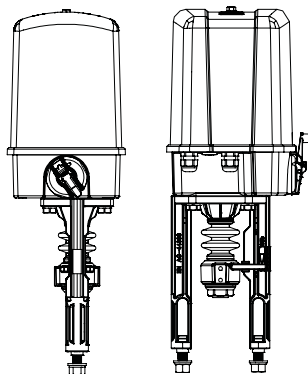

Page 2

Electric thrust actuator
ARI-PREMIO®
12 - 25 kN (2698 - 5620 lbf)

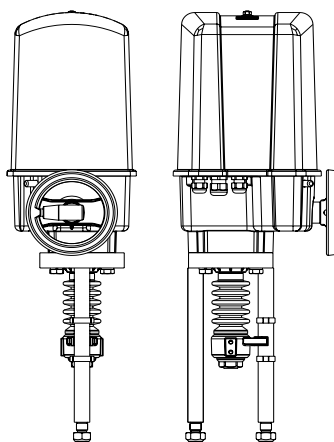



Page 4




Features

- 2 torque switches
- Handwheel
- Operative ambient temperatures -4 °F up to +158 °F
- Enclosure IP 65
- Additional devices available, e.g. potentiometer
- Travel indicator


Electric thrust actuator ARI-PREMIO® 2,2 - 5 kN (495 - 1124 lbf)

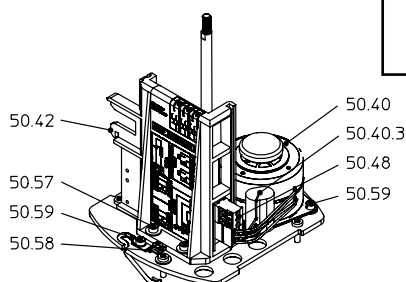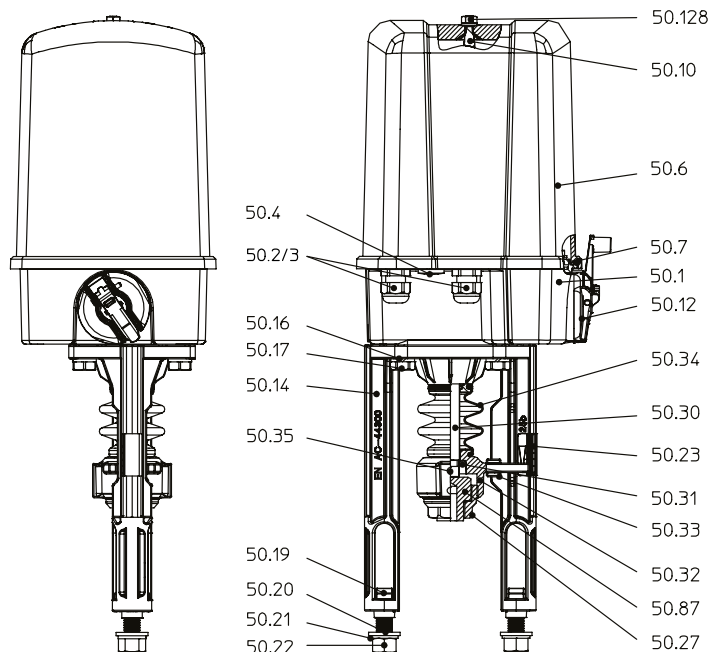



**Synchronous motor
230 V AC**



**BLDC motor
24 V AC/DC**



**BLDC motor
100 - 240 V AC**



Pos.	Description
50.1	Gearbox
50.2/3	Cable gland 2 x M16 x 1,5
50.4	Sealing plug 1 x M16 x 1,5
50.6	Hood
50.7	Hood seal
50.10	Column
50.11	Conical spring washer
50.12	Handwheel
50.14	Yoke
50.16	Spring washer DIN 128 - A10
50.17	Hexagon screw DIN EN ISO 4017 - M10 x 40
50.19	T-head bolt DIN 261 - M12 x 40
50.20	Washer DIN EN ISO 7089
50.21	Spring washer DIN 128 - A12
50.22	Hexagon nut DIN EN ISO 4032 - M12
50.23	Lift dial
50.27	Coupling
50.30	Driving spindle
50.31	Spindle safety feature
50.32	Torsion safety feature
50.33	Slide

Pos.	Description
50.34	Bellow
50.35	Grub screw DIN ISO 4766 - M6
50.40	Synchronous motor, complete
50.40.3	Capacitor
50.42	Board support, cpl. (incl. circuit board 2 x DE, 1 x WE)
50.45	Shift lever
50.48	Connector, 3-pole (standard)
50.57	Cylinder screw DIN EN ISO 4762 - M4 x 10
50.58	Protective conductor terminal
50.59	Cylinder screw DIN EN ISO 4762 - M4 x 6
50.87	Threaded bush
50.128	Collar nut with sealing ring M6
50.143	Connector, 2-pole (N/L)
50.175	BLDC motor
50.177	Cylinder screw M4 x 18
50.223	Input board ESP with power supply
50.224	Distance bolt M4 x 65
50.225	Protective cover BLDC ESP
50.226	Connector, 3-pole (0 V/24 V up/down)
50.227	Board support PREMIO, cpl. BLDC




Technical data


Type		ARI-PREMIO® 2,2 kN (495 lbf)		ARI-PREMIO® 5 kN (1124 lbf)	
Thrust force	lbf	495		1124	
Operating speed	in/s	0.015	0.01 / 0.015 / 0.019 / 0.039 adjustable		
Travel distance max.	in	1.97			
Duty cycle acc. to EN ISO 22153		Class C (modulation) @158°F			
Supply voltage	V - Hz	230 V - 50/60 Hz	24 V AC/DC		
Motor type		Synchronous motor	BLDC (Brushless DC motor)		
Power consumption	VA	21	max. 22	max. 65	
Current consumption	A	approx. 0,1 A	approx. 1 A	approx. 2,5 A	
Torque switch		2 pcs., fixed wiring switching capacity 10 A, 250 V~			
Travel switch		1 pc., fixed wiring switching capacity 10 A, 250 V~ (Options trip slide necessary!)			
Enclosure EN 60529		IP 65			
Max. storage temperature	°F	-40 °F ... +185 °F			
Max. permissible ambient temperature	°F	-4 °F ... +158 °F, for UL/CSA version up to max. +140 °F (For outdoor use and sub-zero temperatures, a heating is recommended!)			
Hand operating device		Yes (always running)			
Operation		3-point - Response time up to 100 ms	3-point - Response time approx. 80 ms		
Max. cable cross section	in²	3-point-input: 0.0039 in²			
Cable diameter for cable glands		2 x M16 x 1.5: 0.20 - 0.37 in			
Electrical safety according to DIN EN 61010, part 1		Overvoltage category II Pollution degree 2 Altitude up to 2000 m Rel. humidity ≤ 90 % non-condensing			
Mounting position		Any, except: motor not hanging downwards			
Gear lubricant		Klüber Isoflex Topas NB152			
Weight	lbs	13			
Accessories		refer to page 6			

Additional voltage / frequencies


Type		100 - 240 V AC switching power supply for BLDC version	
Thrust force	lbf	495	1124
Input voltage	V - Hz	3-point signal: 100 - 240 V AC 50/60 Hz	
Output voltage	V	24 V DC	
Output signal		3-point (TTL technology)	
Current consumption max.	A	max. 0,4 A at 230 V/0,6 A at 115 V	
Response time	ms	approx. 400 ms	





Type		3~ 400 V transformer for BLDC version with direction detection and 3-point-output	
Thrust force	lbf	495	1124
Input voltage	V - Hz	UVW: 3~ 400 V - 50/60 Hz	
Output voltage	V	3-point signal: 24 V DC	
Current consumption max.	A	max. 0,13 A	
Response time	ms	< 10 ms	




Electric thrust actuator ARI-PREMIO® 12 - 25 kN (2698 - 5620 lbf)

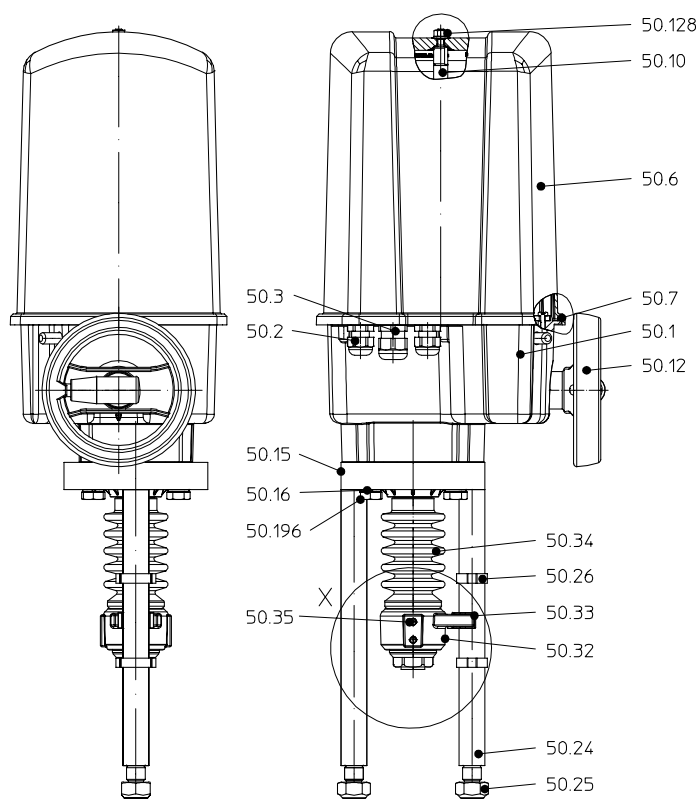

Coupling 25 kN

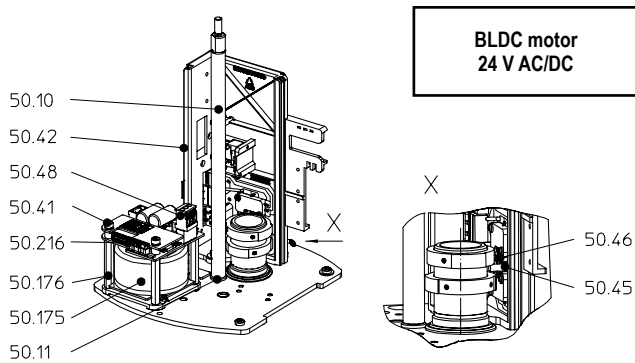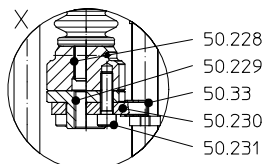

BLDC motor
24 V AC/DC

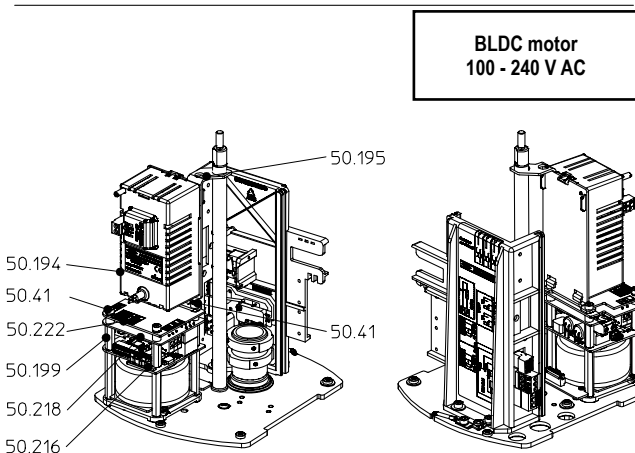

BLDC motor
100 - 240 V AC

Pos.	Description
50.1	Gearbox
50.2/3	Cable gland 2 x M16 x 1,5/1 x M20 x 1,5
50.6	Hood
50.7	Hood seal
50.10	Column
50.11	Conical spring washer
50.12	Handwheel (engageable)
50.15	Flange
50.16	Spring washer DIN 128 - A10
50.24	Distance column
50.25	Hexagon nut DIN EN ISO 7042 - V - M16
50.26	2-ear clamp (Travel indicator)
50.32	Torsion safety feature
50.33	Slide
50.34	Bellow
50.35	Grub screw DIN ISO 4766 - M6
50.41	Cylinder screw DIN EN ISO 4762-M4 - 18
50.42	Board support, cpl. (incl. circuit board 2 x DE; 1 x WE)

Pos.	Description
50.45	Shift lever
50.46	Spring washer
50.48	Connector, 3-pole (standard)
50.128	Collar nut with sealing ring M6
50.175	BLDC motor
50.176	Distance bolt M4 x 45
50.194	Power supply, cpl.
50.195	Fastening angle power supply
50.196	Hexagon screw DIN EN 24017 M10 x 100
50.199	Distance bolt M4 x 23
50.216	Motor control board BLDC
50.218	Input board 3-point without power supply
50.222	Protective cover BLDC without power supply
50.228	Spindle unit
50.229	Threaded bush
50.230	Non-rotation lock
50.231	Cylinder screw M10 x 35




Technical data


Type		ARI-PREMIO® 12 kN (2698 lbf)	ARI-PREMIO® 15 kN (3372 lbf)	ARI-PREMIO® 25 kN (5620 lbf)
Thrust force	lbf	2698	3372	5620
Operating speed	in/s	0.008 / 0.012 / 0.015 / 0.031 adjustable		
Travel distance max.	in	3.15		
Duty cycle acc. to EN ISO 22153		Class C (modulation) @158 °F		
Supply voltage	V - Hz	24 V AC/DC		
Motor type		BLDC (Brushless DC motor)		
Power consumption	VA	max. 65 (depending on the operating speed and operating force)		max. 130 (depending on the operating speed and operating force)
Current consumption	A	approx. 2,5 A		approx. 5 A
Torque switch		2 pcs., fixed wiring switching capacity 16 A, 250 V ~		
Travel switch		1 pc., fixed wiring switching capacity 16 A, 250 V ~ (Options trip slide necessary!)		
Enclosure EN 60529		IP 65		
Max. storage temperature	°F	-40 °F ... +85 °F		
Max. permissible ambient temperature	°F	-4 °C ... +158 °C, for UL/CSA version up to max. +140 °C (For outdoor use and sub-zero temperatures, a heating is recommended!)		
Hand operating device		Yes (engageable)		
Operation		3-point - Response time approx. 80 ms		
Max. cable cross section	mm²	3-point-input: 0.0039 in²		
Cable diameter for cable glands		2 x M16 x 1.5: 0.20 - 0.37 in 1 x M20 x 1.5: 0.31 - 0.51 in		
Electrical safety according to DIN EN 61010, part 1		Overvoltage category II Pollution degree 2 Altitude up to 2000 m Rel. humidity ≤ 90 % non-condensing		
Mounting position		Any, except: motor not hanging downwards		
Gear lubricant		Klübersynth G34 - 130		
Weight	lbs	22		24
Zubehör		refer to page 6		

Additional voltage / frequencies

Type		100 - 240 V AC switching power supply for BLDC version		
Thrust force	lbf	2698	3372	5620
Input voltage	V - Hz	3-point signal: 100 - 240 V AC 50/60 Hz		
Output voltage	V	24 V DC		
Output signal		3-point (TTL technology)		
Current consumption max.	VA	max. 1 A at 230 V/ 1,8 A at 115 V		max. 1,1 A at 230 V/ 1,9 A at 115 V
Response time	ms	approx. 240 ms		approx. 350 ms



Type		3~ 400 V transformer		
Thrust force	lbf	2698	3372	5620
Input voltage	V - Hz	UVW: 3~ 400 V - 50/60 Hz		
Output voltage	V	3-point signal: 24 V DC		
Current consumption max.	A	max. 0,13 A		max. 0,35 A
Response time	ms	< 10 ms		

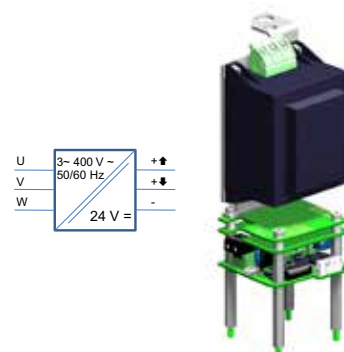




Accessories

Type		ARI-PREMIO® 2,2 kN - 25 kN (495 - 5620 lbf)	
Trip slide		Required for actuating ... - the travel switch S3/retracting spindle (the travel switch S3 is in the basic version of the actuator already available) - the potentiometer - the additional travel switches S4/S5	
Options trip slide necessary !	Additional intermediate position switches S4, S5 (for low switching capacities and at aggressive atmosphere gold contacts should be used)	Type Standard	- 2 pieces, zero potential, switching capacity max. 10 A, 250 V ~
		Type Low voltage	- 2 pieces, zero potential, with gold contacts, switching capacity max. 0,1 A, 4 - 30 V
	Potentiometer	Conductive (max. 2 pcs.)	- 1000, 2000, 5000 Ohm; 1 Watt (at +158 °F) - Wiper current max. 0,01 mA/recommended 0,002 mA
		Wire (max. 2 pcs.)	- 100, 200 Ohm; 0,5 Watt (at +158 °F) - Wiper current max. 35 mA/recommended 0,02 mA
		TÜV-approved potentiometer (max. 2 pcs.)	- TÜV tested „conductive plastic for use as a sensor for position feedback of control devices in electronic systems for controlling and monitoring of fuel, air and gas streams in combustion plants“ - 5000 Ohm (standard) - or optional: 100, 200, 1000 Ohm; 1 Watt (at +158 °F) - Wiper current max. 0,01 mA/recommended 0,002 mA - No retrofitting possible!
	Electronic position controller (for controlling the actuator with an analogue control signal)	Type PREMIO-Plus 2G (according to separate data sheet / operating instructions)	- Input signals: 3-point, 0 - 10 V or 4 - 20 mA - Self-adaptation - Optional position feedback - Galvanical separation between power supply and control signal
		Type ES11	- Input signals 0(2)...10 V or 0(4)...20 mA - Galvanical separation between power supply and control signal - Including potentiometers (note max. number of potentiometers)
	Electronic position indicator (for position feedback with an analogue control signal)	RI21	- Analogue output for position-feedback 0(4)...20 mA changeable to 0(2) - 10 V, invertable; galvanical separation between power supply and control signal - Active - Incl. potentiometers (note max. number of potentiometers)
		RI32	- Analogue output for position-feedback 2... 10 V; 4... 20 mA - Compact design; 2 (passive) or 4-wire technology (active) - Power supply: 24 V AC/DC - Incl. potentiometers (note max. number of potentiometers)
	Heating		Heating resistor
Connection board 2 Torque- and 1 Travel switch, all switch contacts are wired on terminals (for low switching capacities and at aggressive atmosphere gold contacts should be used)	Type Standard PA	- Zero potential, switching capacity 10 A, 250 V ~ - (At 12-25kN already possible with the standard version)	
	Type Low voltage NA	- Zero potential, with gold contacts, switching capacity max. 0,1 A, 4 - 30 V	
(Process-) controller		Type process controller dTRON 316 (according to data sheet / operating instructions PREMIO®-Plus 2G)	- Mounted in the actuator PREMIO®-Plus 2G - 4-20 mA output for operating the PREMIO-Plus 2G - For resistance thermometers and thermocouples (provided by the customer) or standard signals - Pre-configured for temperature control: control range von -328 °F up to +1562 °F (resistance thermometer)
Special voltage 3~ 400 V			
Built-in reversal feature		Electronic reversing contactor (according to data sheet / operating instructions PREMIO®-Plus 2G)	- PREMIO®-Plus 2G with 3~ 400 V transformer - 3-point, 4-20 mA or 0-10 V operation - Electronically commutated, variable speed BLDC motor


Intermediate position switch	
Pos.	Description
50.42	Board support
50.50	Trip slide
50.52	Setting spindle for switch S4
50.53	Setting spindle for switch S5
50.61.2	Travel switch S4
50.61.3	Travel switch S5
50.62	Connector, 6-pole

Potentiometer	
Pos.	Description
50.42	Board support
50.67	Potentiometer
50.68	Connecting cable
50.69	Self-tapping screw
50.70	Pinch spring
50.71	Slide block
50.73	Pinion
50.74	Connector, 3-pole

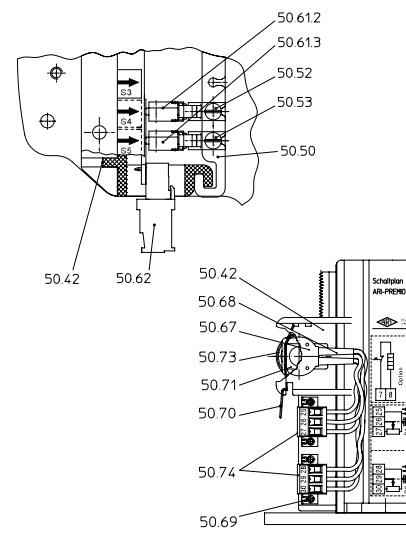



Electronic position controller ES11						
Motor type		BLDC motor		Synchronous motor		
Operating voltage	U _B	24 V - DC	24 V - AC	24 V - AC	115 V - AC	230 V - AC
		--	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Operating current without load	I _B	150 mA			40 mA	20 mA
Input control signal	Y _U	0(2) 10 V DC - (RI = 30 kOhm)				
Input control signal	Y _I	0(4) 20 mA DC - (RI = 125 Ohm)				
Potentiometer input	R _P	0 10 kOhm, recommended 0 1 kOhm (Potentiometer can be used only as a voltage divider)				
3-point-output	U _A	24 V - DC		24 V - AC	115 V - AC	230 V - AC
3-point-switching current	I _S	4 A max.				


Electronic position indicator RI21				
Operating voltage	U_B	24 V - AC/DC 50/60 Hz	115 V - AC 50/60 Hz	230 V - AC 50/60 Hz
Operating current without load	I_B	150 mA	40 mA	20 mA
Output control signal	Y_U	0(2) 10 V DC - (load resistance > 1 kOhm) active		
Output control signal	Y_I	0(4) 20 mA DC - (load resistance max. 800 Ohm) active		
Potentiometer input	R_P	0 1 kOhm		

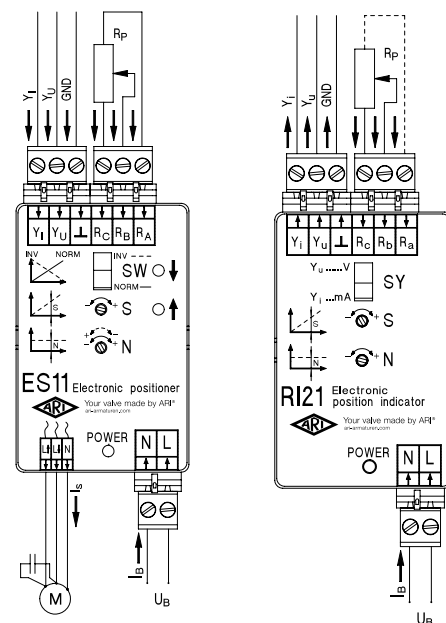

Electronic position indicator RI32		
Operating voltage	U_B	24 V - DC/AC 50/60 Hz
Output control signal	Y_U	2 10 V DC active
Output control signal	Y_I	4 20 mA DC - (load resistance max. 500 Ohm) passive or active
Potentiometer input	R_P	100 Ohm 20 kOhm




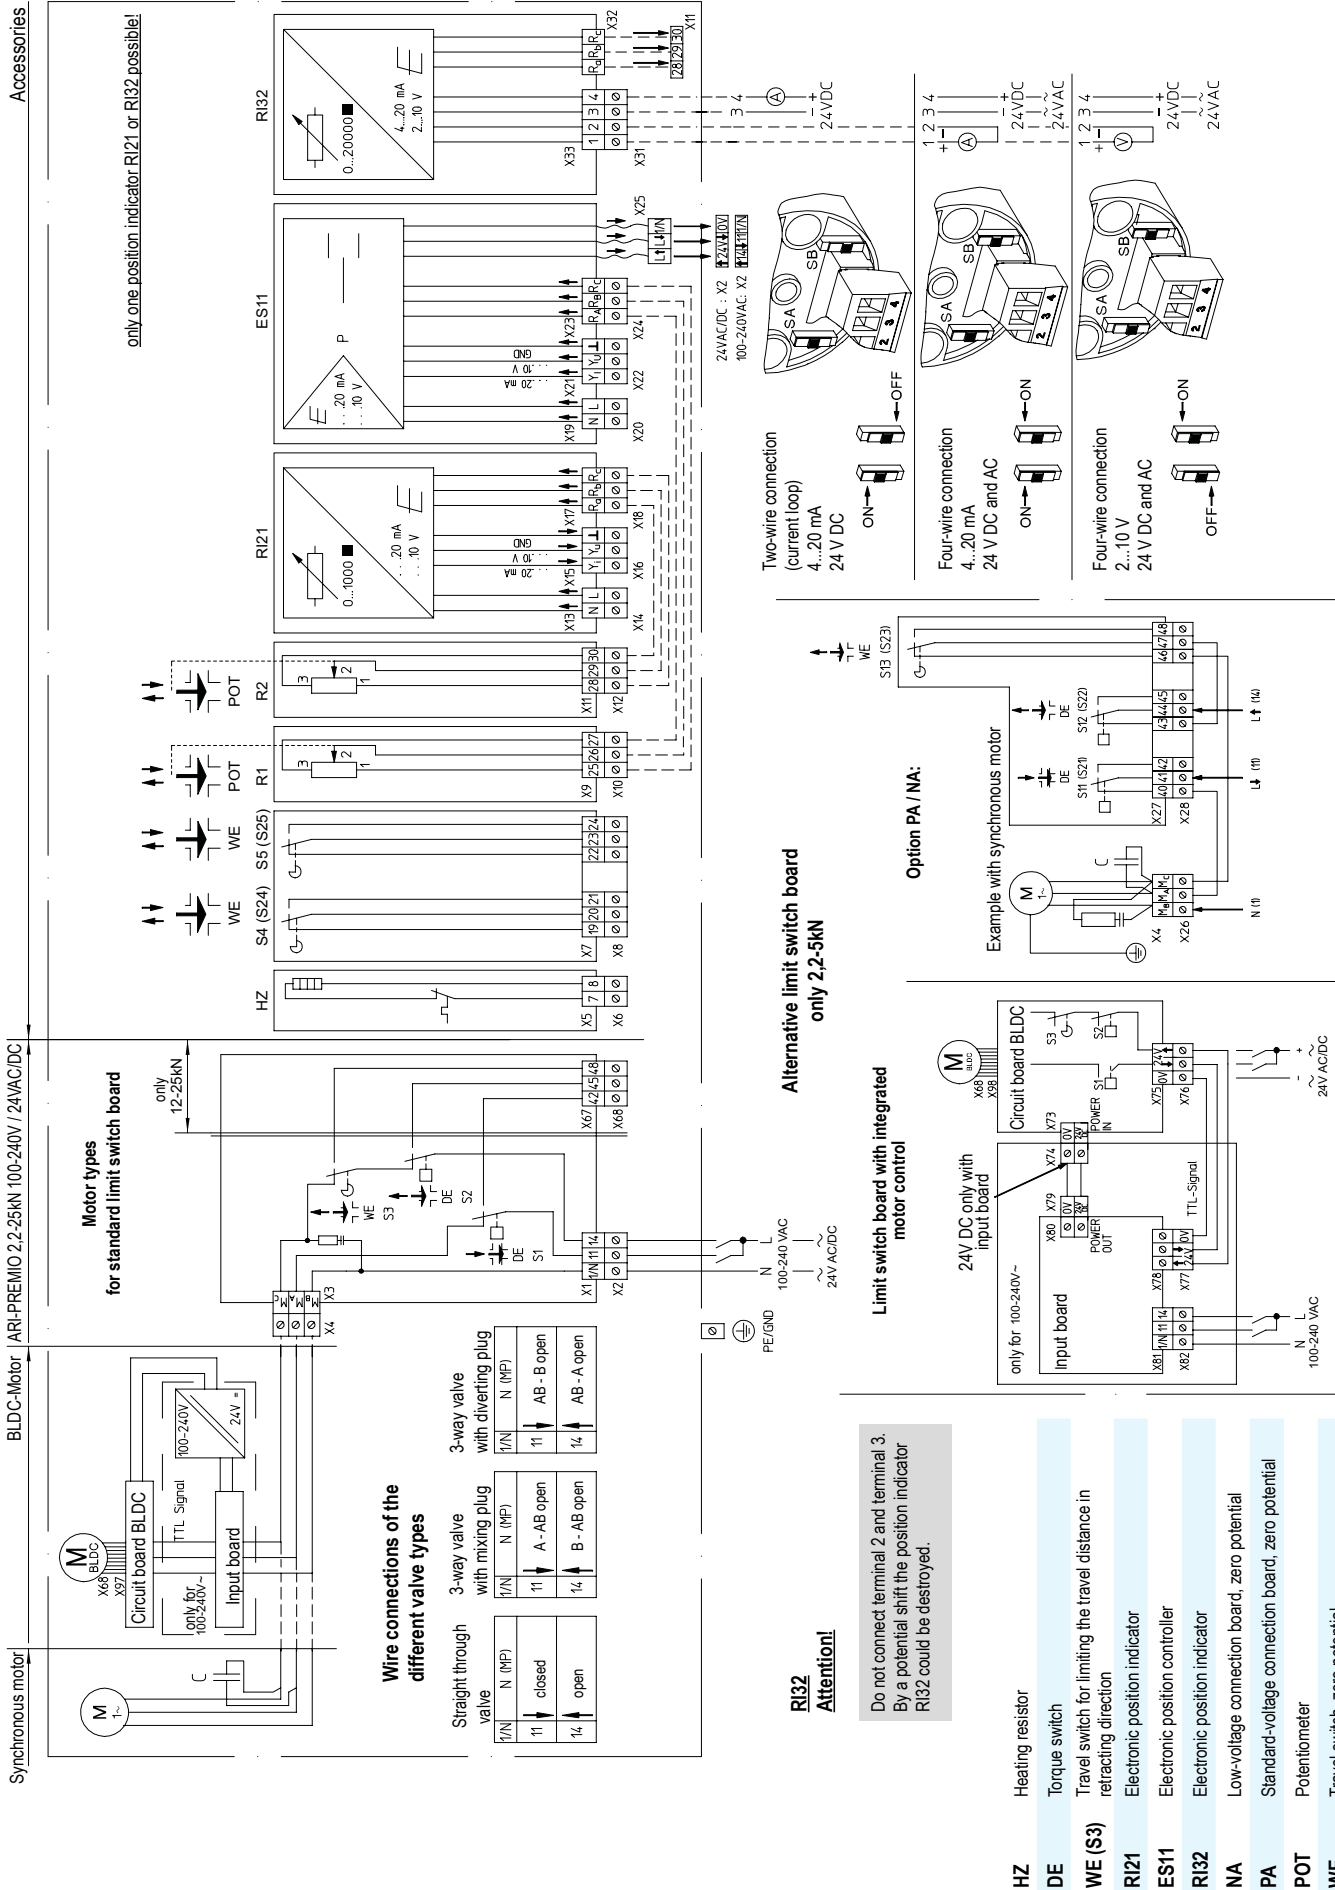


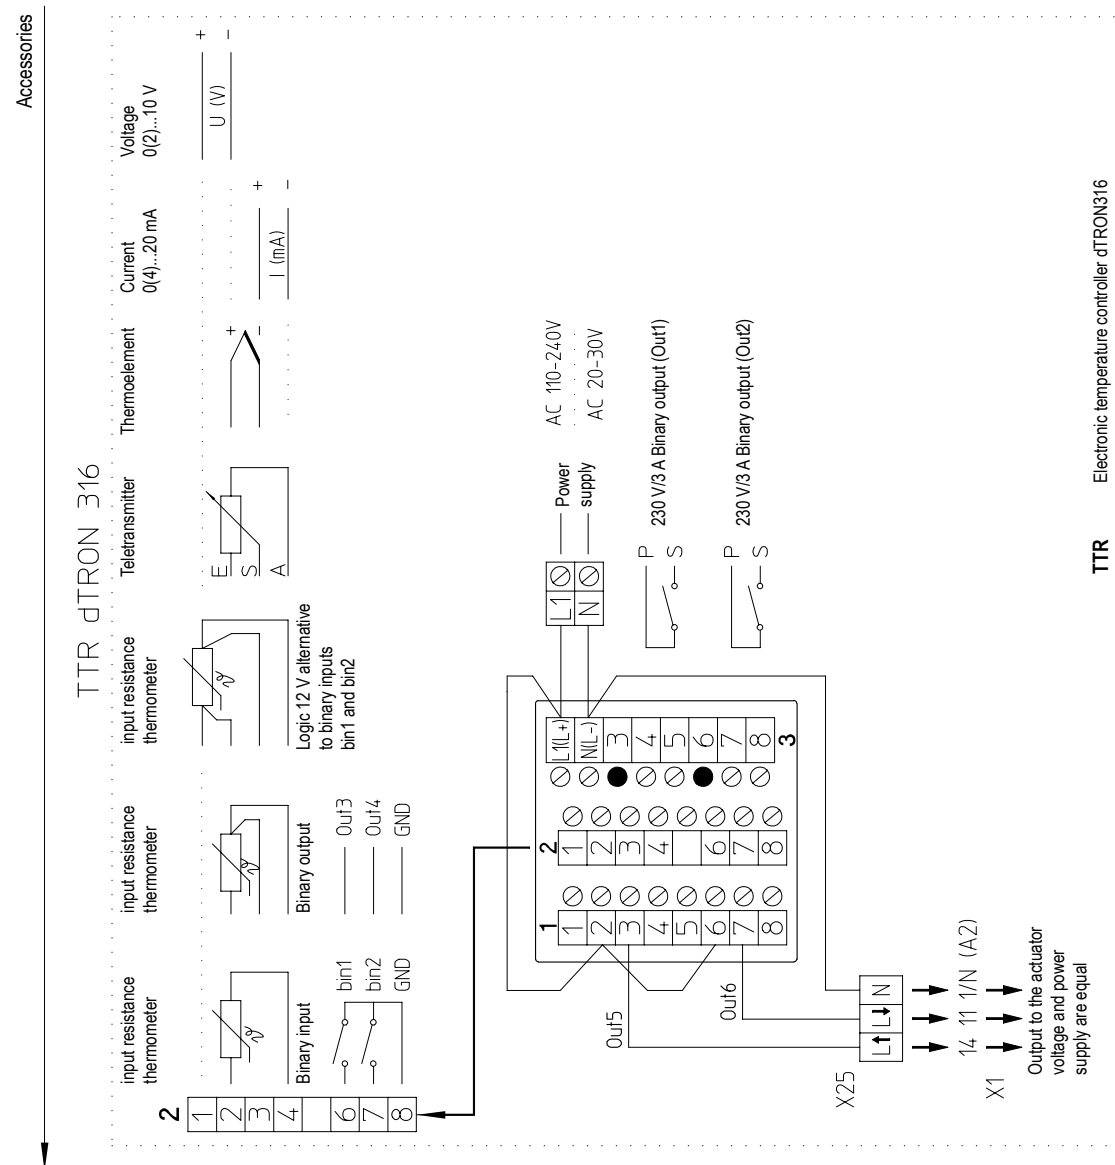


Accessories

ARI-PREMIO 2,2-25kN, 3Ph~ / External reversing contactor

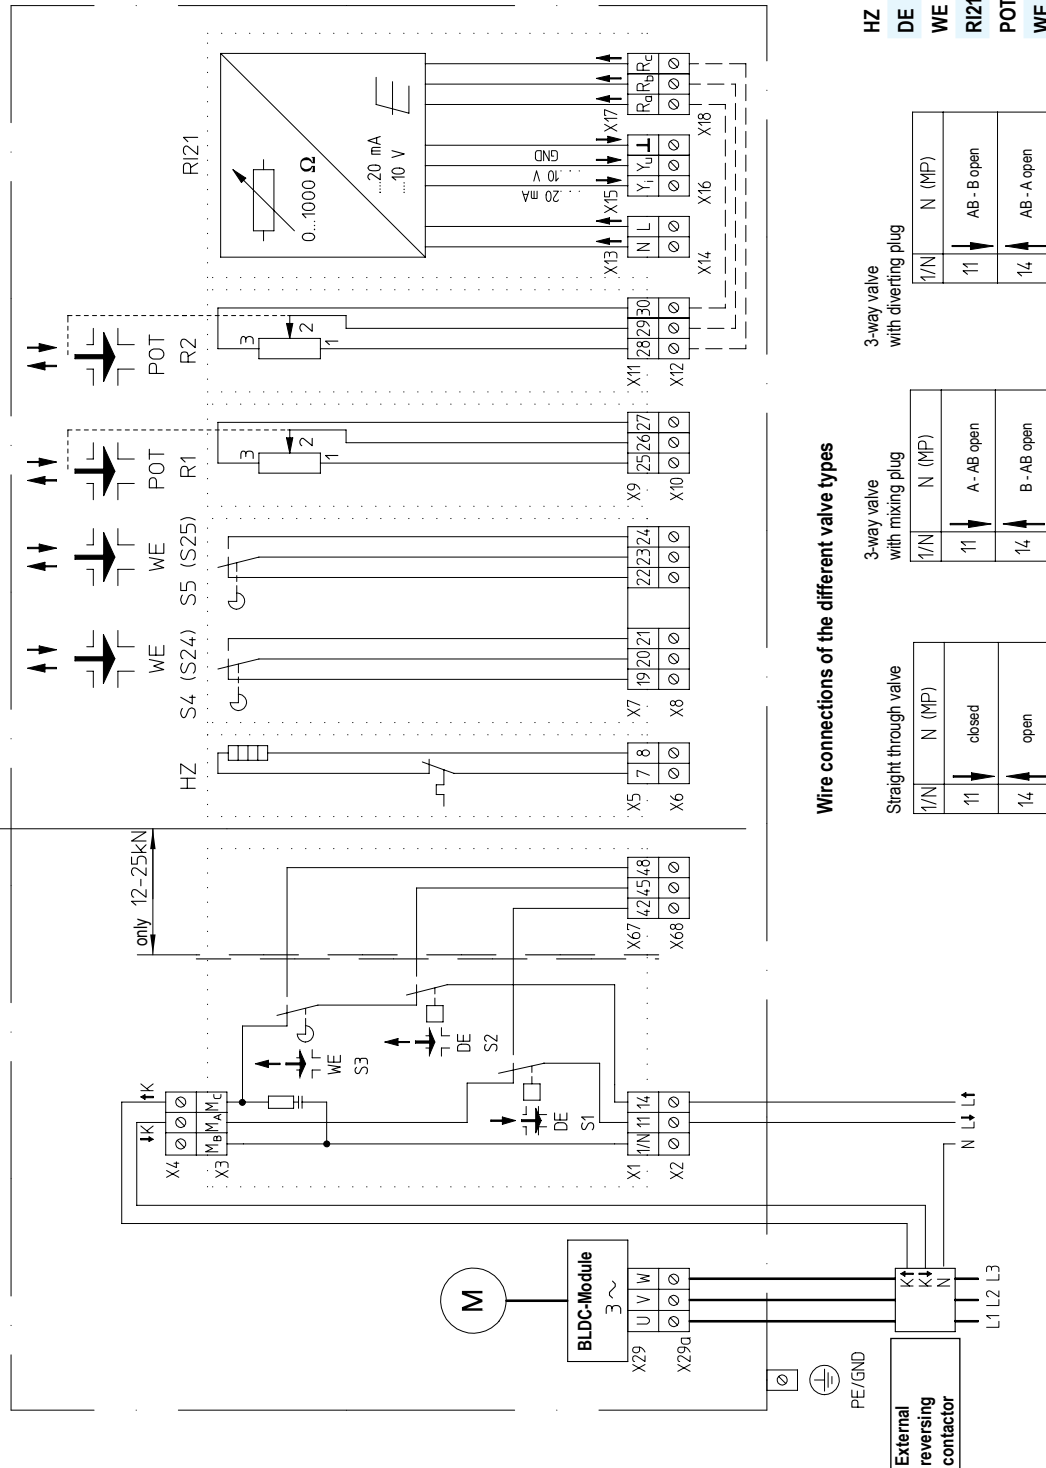

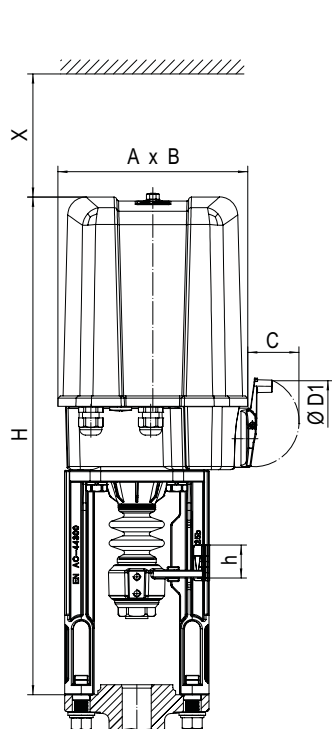


2,2 - 5 kN (495 - 1124 lbf)
Nominal travel max. 1.18 in

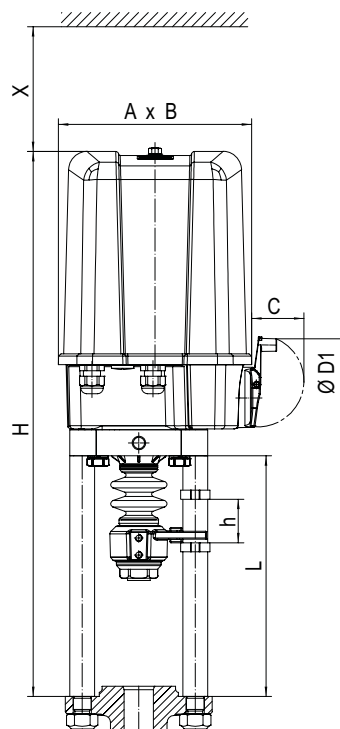

2,2 - 5 kN (495 - 1124 lbf)
Nominal travel > 1.18 in - 1.97 in

		2,2 - 5 kN (495 - 1124 lbf)	
A	(in)	6.73	
B	(in)	6.14	
C	(in)	1.97	
Ø D1	(in)	3.54	
X	(in)	5.91	
H	(in)	17.64	18.98
h (Nominal travel)	(in)	max. 1.18	max. 1.97
L (Column)	(in)	for x = 3,27	7,83 for x = 3,86 8,39

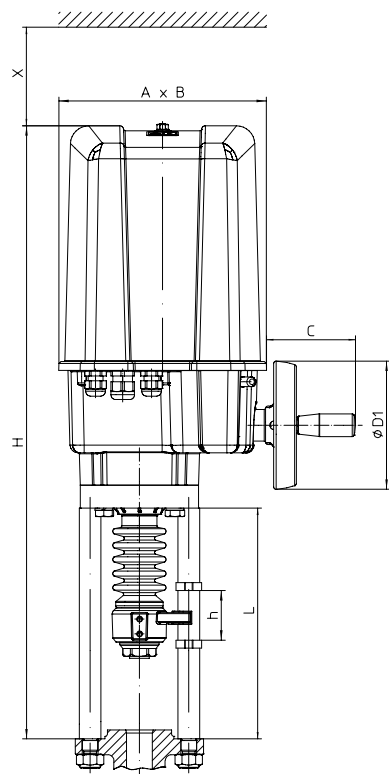

12 - 25 kN (2698 - 5620 lbf)
Nominal travel max. 3.15 in

		12 - 25 kN (2698 - 5620 lbf)		
A	(in)	8.27		
B	(in)	7.24		
C	(in)	3.54		
Ø D1	(in)	5.12		
X	(in)	7.87		
H	(in)	24.49	25.08	25.67
h (Nominal travel)	(in)	max. 1.97	max. 2.56	max. 3.15
L (Column)	(in)	9.21	9.8	for x = 3,27 9.8 for x = 3,86 10,39

