

xylem

Lowara® 1300 series submersible pumps

Reliable solids handling for commercial buildings

50 Hz



 **LOWARA**
xylem

Tough to beat

Combining performance and quality in a convenient package, the Lowara 1300 submersible pump series offers outstanding value for commercial operations' sewage and surface wastewater handling needs.

The Lowara 1300 series is based on technology tested in tough environments the world over. The hydraulic design has been proven to reduce clogging and maintain efficiency, helping to keep your operation running smoothly with minimal maintenance.

Day in, day out, and under harsh conditions, these pumps won't let you down.

Reliable

Non-clog and vortex impeller options provide effective solids handling.

Robust

All components are made from robust materials for easy maintenance and long life.

Powerful

The motor is specifically designed for reliable operation in submersible applications. F-class insulation allows for continuous running without overheating.

Durable

Heavy-duty bearings with long life provide peace of mind. Additionally, the pumps can handle 15 starts per hour without any problem.

Environmentally friendly

The cooling system is designed to use its surroundings to cool the pump; there is no use of environmentally hazardous fluids such as oils.

Safe and straightforward


Cable entry prevents both cable strain and leakage.

Smooth

The double mechanical seal provides extra reliability and protects against leakage.

Flexible

The drilled pump housing is ready for any wet well installation method.

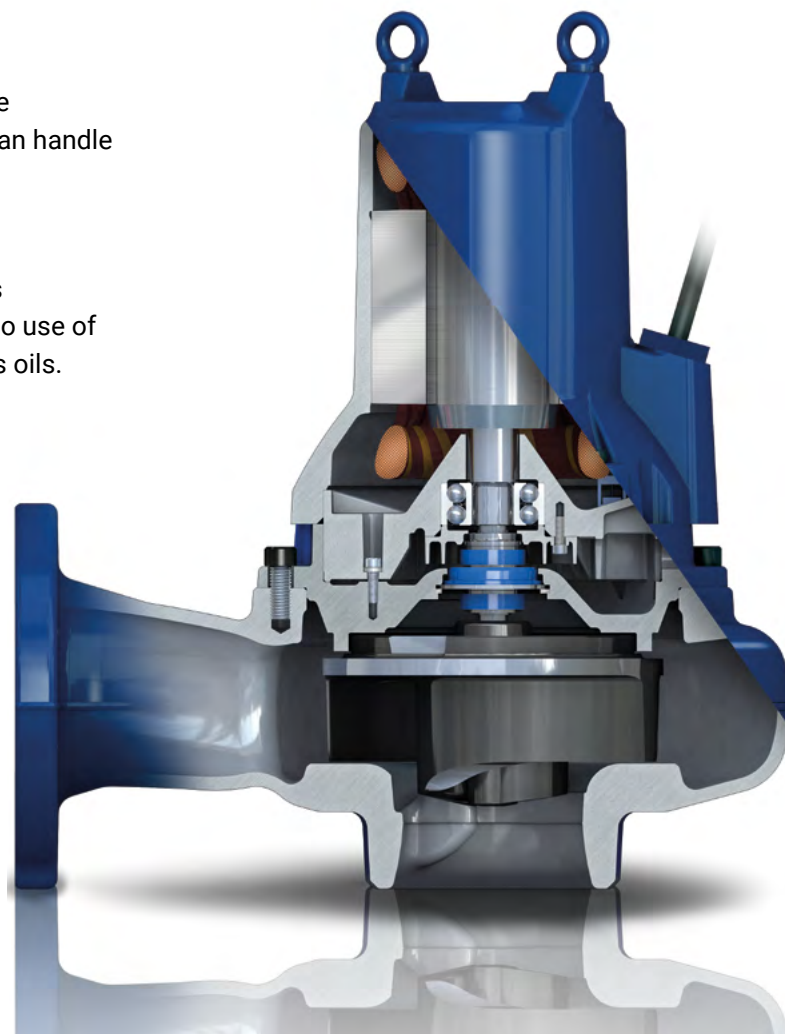

The right pump, readily available

DN50

Lowara 1305 non-clog

Model 1305S
Maximum flow 14 l/s
Maximum pressure 16 m
Motor rating 0.75 - 1.2 kW

Lowara 1310 non-clog

Model 1310S
Maximum flow 18 l/s
Maximum pressure 25 m
Motor rating 1.4 - 2.4 kW

Lowara 1310 vortex

Model 1310H
Maximum flow 10 l/s
Maximum pressure 14 m
Motor rating 1.7 kW

DN65

Lowara 1310 non-clog

Model 1310S
Maximum flow 18 l/s
Maximum pressure 25 m
Motor rating 1.4 - 2.4 kW

Lowara 1310 vortex

Model 1310M
Maximum flow 13 l/s
Maximum pressure 9 m
Motor rating 1.7 kW

Lowara 1315 non-clog

Model 1315S
Maximum flow 30 l/s
Maximum pressure 30 m
Motor rating 4.4 kW

DN80

Lowara 1310 vortex

Model 1310L
Maximum flow 16 l/s
Maximum pressure 10 m
Motor rating 2.0 kW

Lowara 1320 non-clog

Model 1320S
Maximum flow 35 l/s
Maximum pressure 41 m
Motor rating 4.8 - 7.5 kW

Lowara 1320 vortex

Model 1320H
Maximum flow 25 l/s
Maximum pressure 26 m
Motor rating 4.8 - 6.2 kW

DN100

Lowara 1315 non-clog

Model 1315M
Maximum flow 54 l/s
Maximum pressure 14 m
Motor rating 1.9 - 3.3 kW

Lowara 1320 non-clog

Model 1320H
Maximum flow 65 l/s
Maximum pressure 20 m
Motor rating 4.5 - 5.9 kW




Application areas

- Domestic sewage pumping stations
- Wastewater pumping stations
- Stormwater pumping stations
- Drainage water
- Groundwater

Installation methods and accessory kits

The Lowara 1300 series is designed to fit your needs. You start with a bare pump and order the kit for your preferred installation method. Typically these pumps are permanently installed. Free-standing installation is also available so that a pump can be easily moved from one site to another.

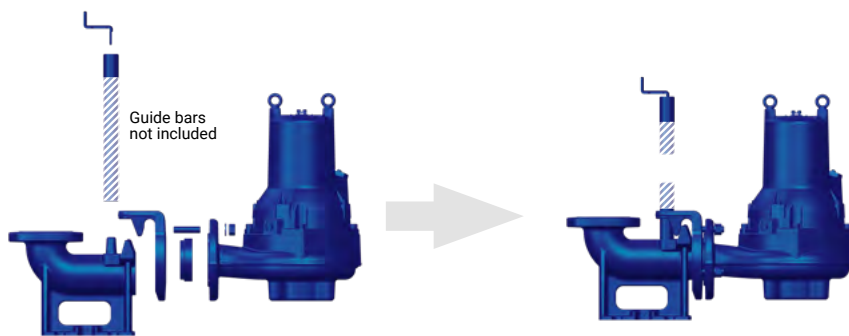


Wet-well kit

The pump is installed with twin guide bars on a discharge connection

Kit contents:

- Discharge connection
- Anchor bolts
- Guide claw with bolts
- Upper guide bar bracket with bolts

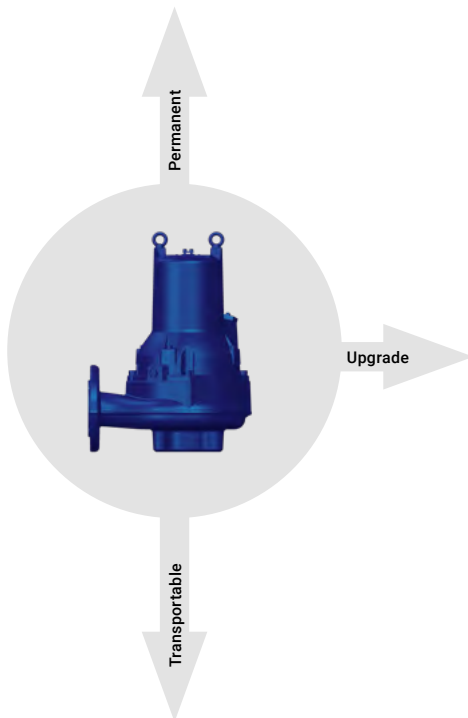

Replacement kit

Simple kit to replace an old pump or upgrade to a larger model

Kit contents:

- Guide claw with bolts



Free-standing kit

Ideal for portability

Kit contents:

- Hose connection with bolts
- Stand with bolts

Selecting and ordering

We've made it easy for you to select and configure your pump with appropriate accessories. It's done in just three simple steps and you build your order number as you go.

1 Select the pump model ideal for your needs from the product pages that follow.

2 For every model and choice of outlet dimension there is a partially filled order number. Configure your pump from the relevant selection tables and you will automatically get the information to build and complete your order number as you go.

Model Model variant Outlet dimension (nominal, mm) Pole Frequency (5=50, 6=60) Phase

1310**S**-65**X**.2**53**.---.---/--

Selected model **A** **B** **C** **D**

3 Select your accessory kit from the relevant accessory selection tables, i.e., installation kit. Make sure your configuration corresponds to the right order number and accessory kits and you are ready to order.

Lowara 1310 non-clog

Performance curves

Selection table

Installation kit selection table*

Pump dimensions (mm)

Material selection

Process data

Diagram

A Installation code

B Curve ID


C Voltage

D Cable length

Lowara 1305 non-clog

Performance curves

DN50

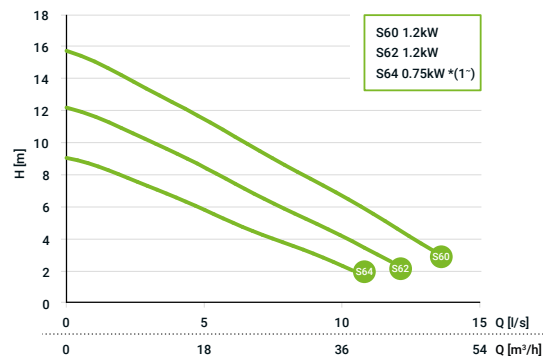

Selection table

Model	DN	Installation*	Pole	Freq (Hz)	Phase	Rated power	Curve no	Voltage	Cable	Order number**
1305S	50	W, T	2	50	1,3	[See chart]	S60, S62, S64	230, 400	10 m	1305S-50-.25-.-.-.-.-/-

* W=Wet well only. T=Free-standing threaded outlet only.

** For information on configuring the right order number, see page 5. Pumps come standard with thermal switches. Leakage detector optional.

Pump data

1305S	
Impeller type	Non-clog
Outlet size (mm)	50
Weight (kg)	30
Pole	2
Insulation class	F
Starts per hour	15

Motor data

1305S		
Voltage	400	230
Phase	3	1
Rated power (kW)	1.2	0.75

Material data

- Impeller: Grey cast iron
- Pump housing: Grey cast iron
- Stator housing: Grey cast iron
- Shaft: Stainless steel
- Inner mechanical seal: Carbon/aluminum oxide
- Outer mechanical seal: Silicon carbide/silicon carbide
- O-rings: Nitrile

Installation kit selection table*

DN	Free-standing	Wet well	Replacement
50	Included	1305-50W	Included



* For more information, see page 4.

Process data

- Max submergence: 20m
- Max fluid temp: 40° C
- pH range of pumped liquid: 5.5-14

Pump dimensions (mm)


	Free-standing 1305S	Wet well 1305S
A	418	397
B	298	272
C	116	116
D	182	156
E	97	97
F	119	120
G	121	44

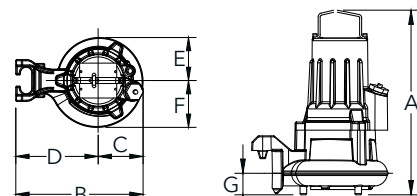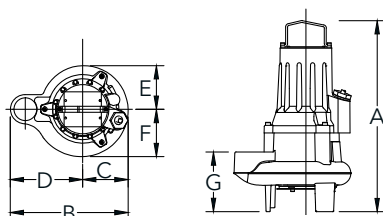


Lowara 1310 non-clog

Performance curves

DN50

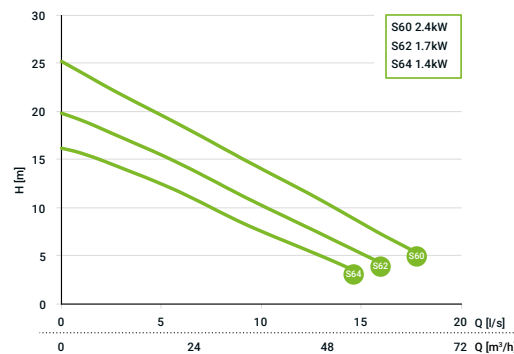

DN65

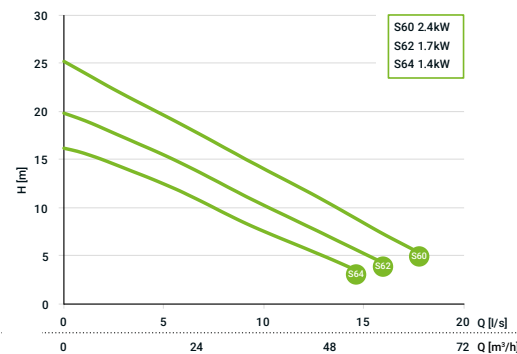

Selection table

Model	DN	Installation*	Pole	Freq (Hz)	Phase	Rated power	Curve no	Voltage	Cable	Order number**
1310S	50	W, T	2	50	1,3	[see chart]	S60, S62, S64	230, 400	10 m	1310S-50-.25-.---.---/--
1310S	65	X	2	50	1,3	[see chart]	S60, S62, S64	230, 400	10 m	1310S-65X.25-.---.---/--

* W=Wet well only. T=Free-standing threaded outlet only. X=Bare pump.

** For information on configuring the right order number, see page 5. Pumps come standard with thermal switches. Leakage detector optional.

Pump data

	1310S
Impeller Type	Non-clog
Outlet size (mm)	50 65
Weight (kg)	38
Pole	2
Insulation Class	F
Starts per hour	15

Motor data

	1310S					
Voltage	400	400	400	230	230	230
Phase	3	3	3	1	1	1
Rated power (kW)	2.4	1.7	1.4	1.5	1.7	1.5

Material data

- Impeller: Grey cast iron
- Pump housing: Grey cast iron
- Stator housing: Grey cast iron
- Shaft: Stainless steel
- Inner mechanical seal: Carbon/aluminum oxide
- Outer mechanical seal: Cemented carbide/aluminum oxide
- O-rings: Nitrile

Process data

- Max submergence: 20m
- Max fluid temp: 40° C
- pH range of pumped liquid: 5.5-14


Installation kit selection table*

DN	Free-standing	Wet well	Replacement
50	Included	1310-50W	Included
65	1310-65H (hose), 1310-65T (threaded)	1310-65W	1310-65R

* For more information, see page 4.

Pump dimensions (mm)

	Free-standing 1310S	Wet well 1310S	X-installation 1310S
A	433	422	457
B	304	287	318
C	112	112	118
D	192	175	200
E	103	103	103
F	123	123	123
G	121	45	100

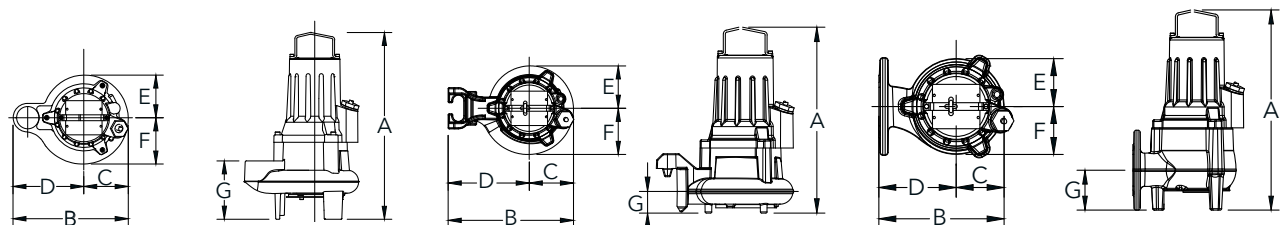


Lowara 1310 vortex




Performance curves


DN50

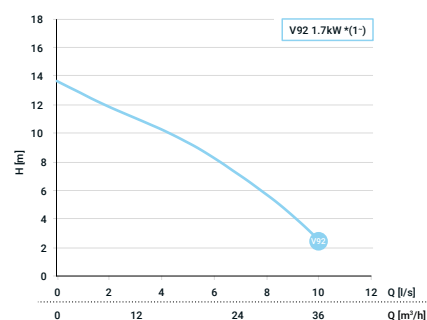

DN65

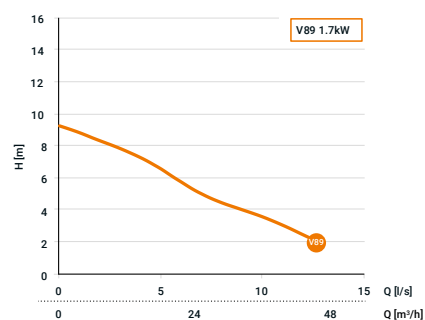

DN80

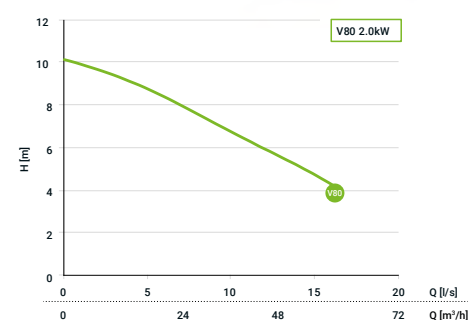

Selection table

Model	DN	Installation*	Pole	Freq (Hz)	Phase	Rated power	Curve no	Voltage	Cable	Order number**
1310H	50	W, T	2	50	1	[see chart]	V92	230	10 m	1310H-50-.251.---.230/--
1310M	65	X	2	50	1,3	[see chart]	V89	230, 400	10 m	1310M-65X.25.---.---/--
1310L	80	X	4	50	3	[see chart]	V80	400	10 m	1310L-80X.453.---.400/--

* W=Wet well only. T=Free-standing threaded outlet only. X=Bare pump.

** For information on configuring the right order number, see page 5. Pumps come standard with thermal switches. Leakage detector optional.

Pump data

	1310H/M	1310L
Impeller Type	Vortex	Vortex
Outlet size (mm)	50 65	80
Weight (kg)	40	41
Pole	2	4
Insulation class	F	F
Starts per hour	15	15

Motor data

	1310H	1310M	1310L
Voltage	230	400 230	400
Phase	1	3 1	3
Rated power (kW)	1.7	1.7 1.7	2

Material data

- Impeller: Grey cast iron
- Pump housing: Grey cast iron
- Stator housing: Grey cast iron
- Shaft: Stainless steel
- Inner mechanical seal: Carbon/aluminum oxide
- Outer mechanical seal: Cemented carbide/aluminum oxide
- O-rings: Nitrile

Process data

- Max submergence: 20m
- Max fluid temp: 40° C
- pH range of pumped liquid: 5.5-14



Installation kit selection table*

DN	Free-standing	Wet well	Replacement
50	Included	1310-50W	Included
65	1310-65H (hose), 1310-65T (threaded)	1310-65W	1310-65R
80	1310-80H (hose), 1310-80T (threaded)	1310-80W	1310-80R

* For more information, see page 4.

Pump dimensions (mm)


Free-standing 1310H		Wet well 1310H	X-installation	
			1310M	1310L
A	503	455	535	464
B	310	285	259	346
C	120	119	99	146
D	190	166	160	200
E	115	114	106	146
F	125	124	106	146
G	165	53	100	85

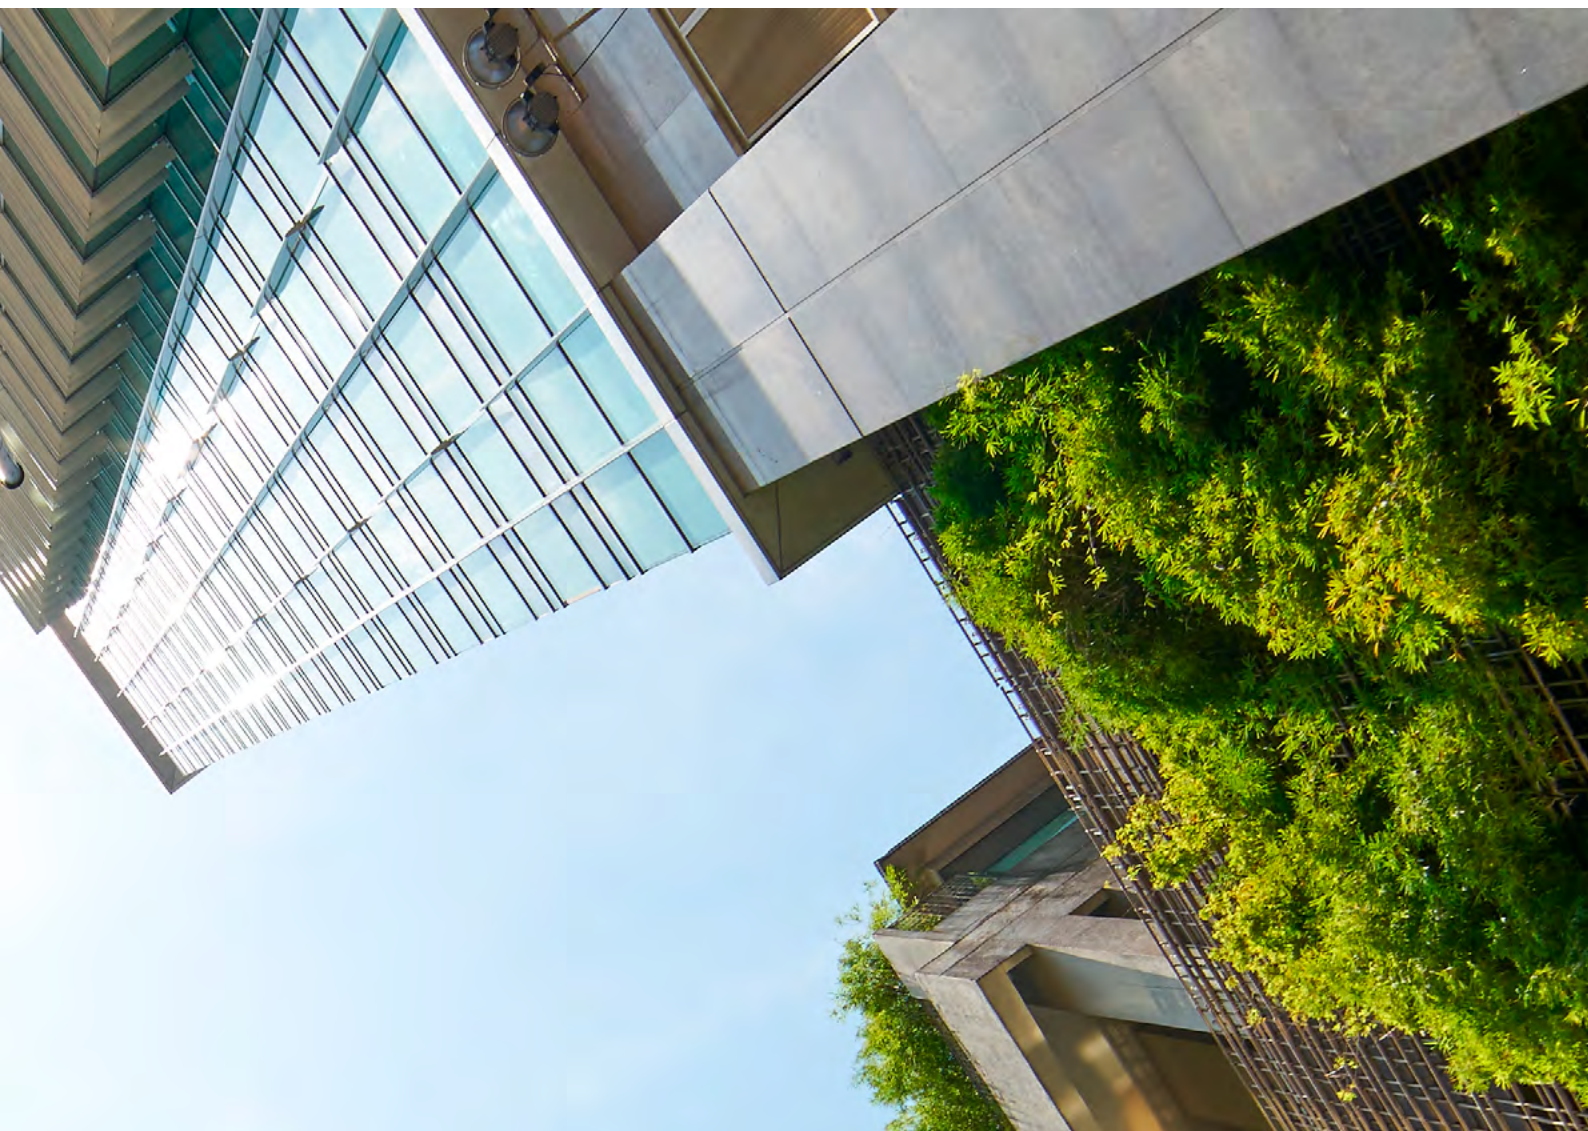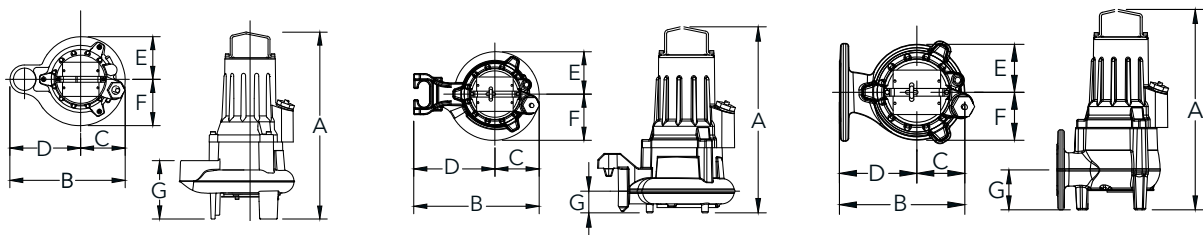


Lowara 1315 non-clog

Performance curves

DN65

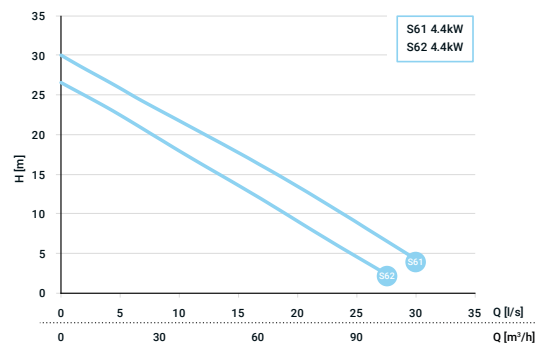

DN100

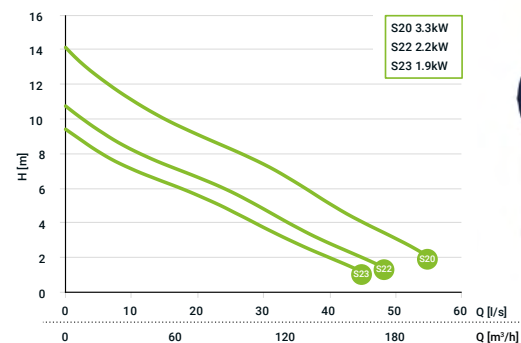

Selection table

Model	DN	Installation*	Pole	Freq (Hz)	Phase	Rated power	Curve no	Voltage	Cable	Order number**
1315S	65	X	2	50	3	[see chart]	S61, S62	400	10 m	1315S-65X.253.---.400/--
1315M	100	X	4	50	3	[see chart]	S20, S22, S23	400	10 m	1315M-100X.453.---.400/--

* X=Bare pump.

** For information on configuring the right order number, see page 5. Pumps come standard with thermal switches. Leakage detector optional.

Pump data

	1315S	1315M
Impeller Type	Non-clog	Non-clog
Outlet size (mm)	65	100
Weight (kg)	81	84
Pole	2	4
Insulation Class	F	F
Starts per hour	15	15

Motor data

	1315S	1315M
Voltage	400	400 400 400
Phase	3	3 3 3
Rated power (kW)	4.4	3.3 2.2 1.9

Material data

- Impeller: Grey cast iron
- Pump housing: Grey cast iron
- Stator housing: Grey cast iron
- Shaft: Stainless steel
- Inner mechanical seal: Carbon/aluminum oxide
- Outer mechanical seal: Cemented carbide/aluminum oxide
- O-rings: Nitrile

Installation kit selection table*

DN	Free-standing	Wet well	Replacement
65	1315-65H (hose), 1315-65T (threaded)	1315-65W	1315-65R
100	1315-100H (hose), 1315-100T (threaded)	1315-100W	1315-100R


* For more information, see page 4.

Process data

- Max submergence: 20m
- Max fluid temp: 40° C
- pH range of pumped liquid: 5.5-14

Pump dimensions (mm)


	1315S	1315M
A	508	524
B	377	464
C	147	179
D	230	285
E	146	161
F	148	194
G	90	109

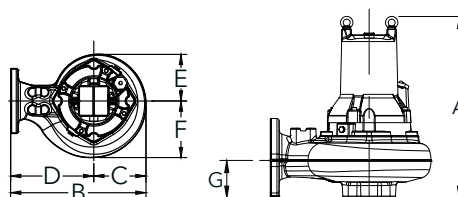

Lowara 1320 non-clog

Performance curves

DN80

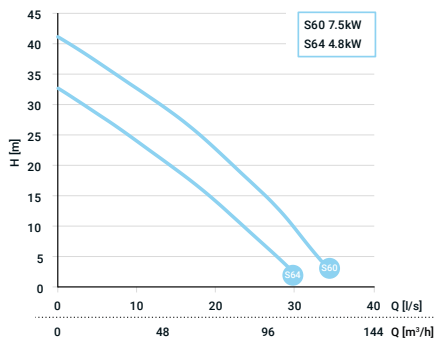

DN100



Selection table

Model	DN	Installation*	Pole	Freq (Hz)	Phase	Rated power	Curve no	Voltage	Cable	Order number**
1320S	80	X	2	50	3	[see chart]	S60, S64	400	10 m	1320S-80X.253.---.400/--
1320H	100	X	4	50	3	[see chart]	S41, S42	400	10 m	1320H-100X.453.---.400/--

* X=Bare pump.

** For information on configuring the right order number, see page 5. Pumps come standard with thermal switches. Leakage detector optional.

Pump data

	1320S	1320H
Impeller Type	Non-clog	Non-clog
Outlet size (mm)	80	100
Weight (kg)	115	134
Pole	2	4
Insulation Class	F	F
Starts per hour	15	15

Motor data

	1320S		1320H	
Voltage	400	400	400	400
Phase	3	3	3	3
Rated power (kW)	7.5	4.8	5.9	4.5

Material data

- Impeller: Grey cast iron
- Pump housing: Grey cast iron
- Stator housing: Grey cast iron
- Shaft: Stainless steel
- Inner mechanical seal: Carbon/cemented carbide
- Outer mechanical seal: Cemented carbide/cemented carbide
- O-rings: Nitrile

Installation kit selection table*

DN	Free-standing	Wet well	Replacement
80	1320-80H (hose), 1320-80T (threaded)	1320-80W	1320-80R
100	1320-100H (hose), 1320-100T (threaded)	1320-100W	1320-100R


* For more information, see page 4.

Process data

- Max submergence: 20m
- Max fluid temp: 40° C
- pH range of pumped liquid: 5.5-14

Pump dimensions (mm)


	1320S	1320H
A	570	592
B	425	523
C	165	213
D	260	310
E	151	194
F	172	232
G	90	117

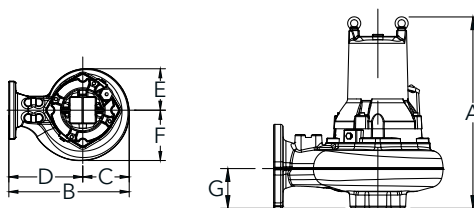

Lowara 1320 vortex

Performance curves

DN80

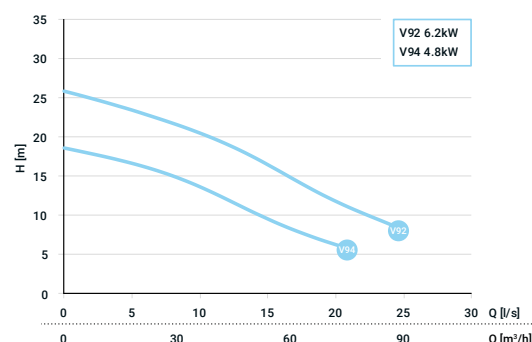

Selection table

Model	DN	Installation*	Pole	Freq (Hz)	Phase	Rated power	Curve no	Voltage	Cable	Order number**
1320H	80	X	2	50	3	[see chart]	V92, V94	400	10 m	1320H-80X.253.---.400/--

* X=Bare pump.

** For information on configuring the right order number, see page 5. Pumps come standard with thermal switches. Leakage detector optional.

Pump data

	1320H
Impeller Type	Vortex
Outlet size (mm)	80
Weight (kg)	125
Pole	2
Insulation Class	F
Starts per hour	15

Motor data

	1320H	
Voltage	400	400
Phase	3	3
Rated power (kW)	6.2	4.8

Material data

- Impeller: Grey cast iron
- Pump housing: Grey cast iron
- Stator housing: Grey cast iron
- Shaft: Stainless steel
- Inner mechanical seal: Carbon/cemented carbide
- Outer mechanical seal: Cemented carbide/cemented carbide
- O-rings: Nitrile

Installation kit selection table*

DN	Free-standing	Wet well	Replacement
80	1320-80H (hose), 1320-80T (threaded)	1320-80W	1320-80R


* For more information, see page 4.

Process data

- Max submergence: 20m
- Max fluid temp: 40° C
- pH range of pumped liquid: 5.5-14

Pump dimensions (mm)

	1320H
A	610
B	375
C	165
D	210
E	154
F	154
G	100

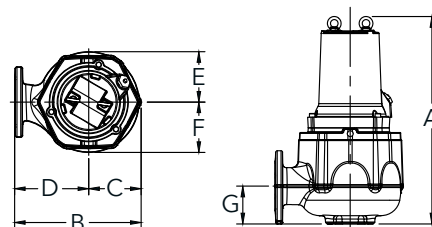

All information presented herein is believed reliable and in accordance with accepted engineering practices. Xylem makes no warranties as to the completeness of this information. Users are responsible for evaluating individual product suitability for specific applications. Xylem assumes no liability whatsoever for any special, indirect or consequential damages arising from the sale, resale or misuse of its products. Subject to change without notice.

© 2015-2026 Xylem Inc. or its affiliates. All rights reserved. Lowara is a trademark of Xylem or one of its subsidiaries.

1944 / 191004521 . Lowara 1300 series . Master . 2 . 20260925

xylem
Let's Solve Water