


# Forget Dirt Strainer

DN15-DN500  
CL800-CL2500

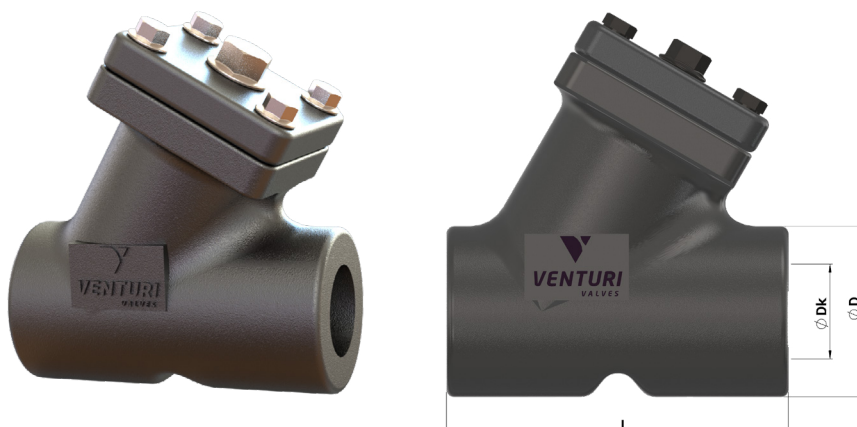

List of Materials

| List of Materials |              |                                           |                    |             |             |                    |              |
|-------------------|--------------|-------------------------------------------|--------------------|-------------|-------------|--------------------|--------------|
| Item              | Part         | Material Group acc. to ASME B16.34        |                    |             |             |                    |              |
|                   |              |                                           |                    |             |             |                    |              |
|                   |              | Application                               |                    |             |             |                    |              |
|                   |              | -29°C÷425°C                               | -46°C÷345°C        | -29°C÷550°C | -29°C÷550°C | -196°C÷600°C       | -196°C÷600°C |
| 1                 | Body         | A216 WCB                                  | A352 LCB           | A217 WC6    | A217 C5     | A351 CF8           | A351 CF8M    |
| 2                 | Cover        | A216 WCB                                  | A352 LCB           | A217 WC6    | A217 C5     | A351 CF8           | A351 CF8M    |
| 3                 | Net          | AISI 304 / AISI 316                       |                    |             |             |                    |              |
| 4                 | Stud Bolts   | A193 B7                                   | A193 B116 / 1.7709 |             |             | A193 B8 / A193 B8M |              |
| 5                 | Nuts         | A194 2H                                   | A194 4 / 1.7709    |             |             | A193 B8 / A194 B8M |              |
| 6                 | Cover Gasket | Spiral - Wound / Reinforced pure graphite |                    |             |             |                    |              |

Standarts

| Strainers according to ASME | Class 800 ÷ Class 2500 |
|-----------------------------|------------------------|
| Face-to-face dimensions     | ASME B16.10            |
| Flanged ends                | ASME B16.5             |
| Welding ends                | ASME B16.25            |

Dimensions CL800

| DN   |    | 20 | 20  | 25  | 32  | 40  | 50  |
|------|----|----|-----|-----|-----|-----|-----|
| [mm] | L  | 90 | 110 | 110 | 180 | 180 | 185 |
|      | Dk | 60 | 75  | 93  | 144 | 144 | 144 |

Dimensions CL1500

| DN   |    | 15  | 20  | 25  | 40  | 50  |
|------|----|-----|-----|-----|-----|-----|
| [mm] | L  | 110 | 130 | 180 | 185 | 205 |
|      | Dk | 75  | 93  | 144 | 144 | 160 |

Dimensions CL1500

| DN   |    | 15  | 20  | 25  | 40  | 50  |
|------|----|-----|-----|-----|-----|-----|
| [mm] | L  | 190 | 190 | 190 | 190 | 213 |
|      | Dk | 160 | 160 | 160 | 170 | 190 |